


Dyna Spot SO SC



SPECIFICATION

COLOR RANGE	RGBW/RGBA/RGB/DW/Monowhite color
SOURCE LIFE	50,000 hours at 70% lumen maintenance at 25degC
LED TYPE	High Power LEDs
LIGHT SOURCE	Single Chip LEDs
BEAM ANGLE	8deg/15deg/25deg/40deg/60deg or 10x60deg/20x60deg/30x60deg available
POWER CONSUMPTION	150W max.
FLUX LUMINOUS	7650lm max.
CONNECTION	6-core AC/DMX Cable in and Cable out c/w pushlock IP connectors for daisy chain
CONTROLLED	Integrated PSU & DMX/RDM control, AC100~277V input, addressed by RDM Tester with temperature sensor(*wilress DMX control available as option)
TEMPERATURE SENSOR	Auto dim down when overheating
RDM FUNCTIONALTY	DMX Addressing Device Info(Model Name/Manufacture Name) Reading Power State(Current checking / Power consumption) Checking Software Version Reading Fixture Realtime Temperature Checking
LISTING	CE certified
HOUSING	Die-casting aluminum in Grey/black/white color and 12mm thickness temperature
IP RATING	IP66/IP67
IK RATING	IK10
OPERATING TEMPERATURE	-20°C ~ +50°C
STORAGE TEMPERATURE	-20°C ~ +70°C
DIMENSIONS	Dia.288mmx180mm(H)
WEIGHT	15Kgs
ACCESSORIES	Half/Full Snoot and SS safety chain

DIMENSIONS

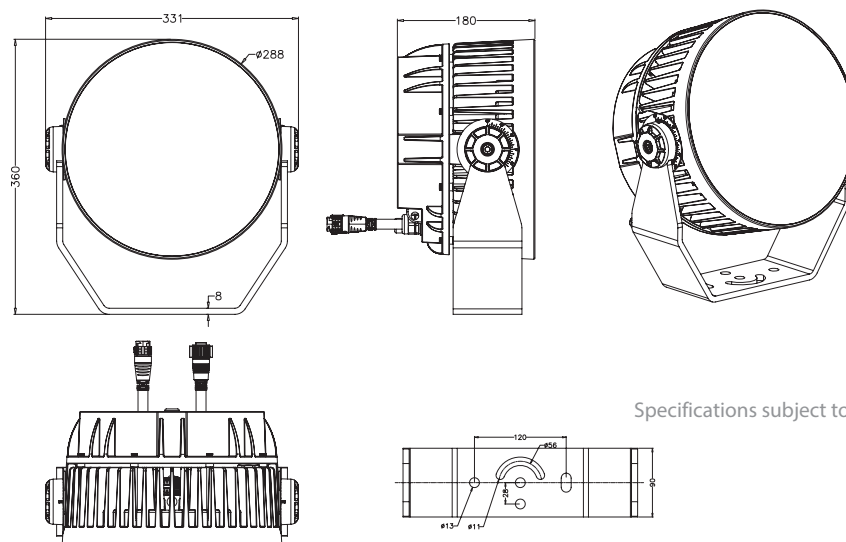

Specifications subject to change without notice